
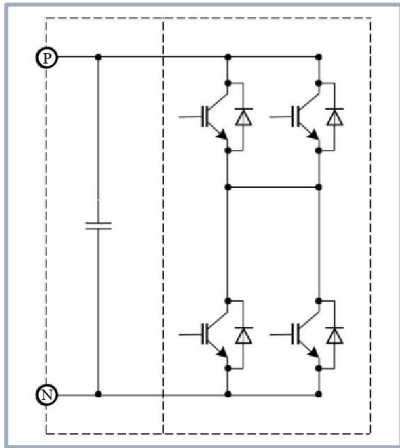


# FPS120H122XA002

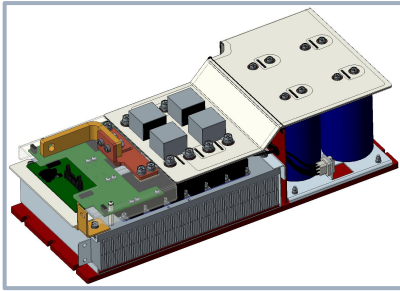

## Ordering No.

- FPS120H122XA002

## Features

- Half bridge
- 2 IGBTs in parallel
- Forced air cooling  
(fans not included)

## Typical Applications

- ESS converter
- Wind power converter
- PV inverter

Symbol	Description	min	typ	max	Unit
<b>Electrical Characteristics</b>					
V <sub>DC</sub>	Rated Full DC bus voltage		800		V
V <sub>AC</sub>	Rated AC voltage		380		V <sub>RMS</sub>
I <sub>AC</sub>	Rated AC current		1200		A <sub>RMS</sub>
I <sub>AC1</sub>	Short-time overload			1400	A <sub>RMS</sub>
f <sub>sw</sub>	Switching frequency			3.5	kHz
PF	Power factor	-1.0		1.0	
P <sub>Loss</sub>	Stack power loss		TVD		kW
V <sub>ISOL</sub>	Insulation voltage		2.5		kV <sub>RMS</sub>
IGBT module	Package	<sup>1</sup> 1200V/1400A PrimePACK™3			

Note1: Taking Infineon modules as an example, modules with compatible packages are available for use.

Symbol	min	typ	max	Unit
<b>Environmental Data</b>				
Air volume $\Delta V / \Delta t$	2500			m <sup>3</sup> /h
Air pressure $\Delta p$		1000		Pa
Inlet temperature T <sub>inlet</sub>	-25		55	°C
Installation altitude	0		1000	m
Protection degree, According to EN 50178	IP00			
Pollution degree, According to IEC 60529	2			
Storage temperature	-40		65	°C
Operational ambient temperature	-25		55	°C
Relative humidity	0		85	%

<b>Mechanical Data</b>				
Dimensions, Length × width × height	602*265.7*176.5			mm
Weight	35			kg
DC terminal mounting torque M <sub>DC</sub>	24			Nm
AC terminal mounting torque M <sub>AC</sub>	55			Nm

## Controller Interface

Symbol	Conditions	min	typ	max	Unit
Auxiliary power supply voltage		13	15	16	V
Auxiliary power requirement			50		W
Auxiliary power supply interface type		Box header connector			
Auxiliary power supply undervoltage threshold			12		V
PWM signal high level threshold			8.3		V
PWM signal low level threshold			4.8		V
Fault output current capability	Fault condition			500	mA
Fault hold time			40		ms


## Controller Signal Connector Pin Definitions

Pin	Name	Function	Pin	Name	Function
1	NC	Undefined, shorted to Pin20	2	VDC	+15V supply voltage
3	VDC	+15V supply voltage	4	VDC	+15V supply voltage
5	GND	GROUND	6	FAULT	Fault return (low fault)
7	GND	GROUND	8	GND	GROUND
9	GND	GROUND	10	BOT-IN	Bottom IGBT signal input
11	GND	GROUND	12	NTC1	1#NTC signal return
13	NTC1	1#NTC signal return	14	FAULT	Fault return (low fault)
15	GND	GROUND	16	TOP-IN	Top IGBT signal input
17	GND	GROUND	18	NTC2	2#NTC signal return
19	NTC2	2#NTC signal return	20	NC	Undefined, shorted to Pin1

## Heating Resistor Connector

Pin	Name	Description	Pin	Name	Description
1	R11	R1 heating resistor pin1	2	R12	R1 heating resistor pin2
3	R21	R2 heating resistor pin1	4	R22	R2 heating resistor pin2
5	R31	R3 heating resistor pin1	6	R32	R3 heating resistor pin2

Dimensions

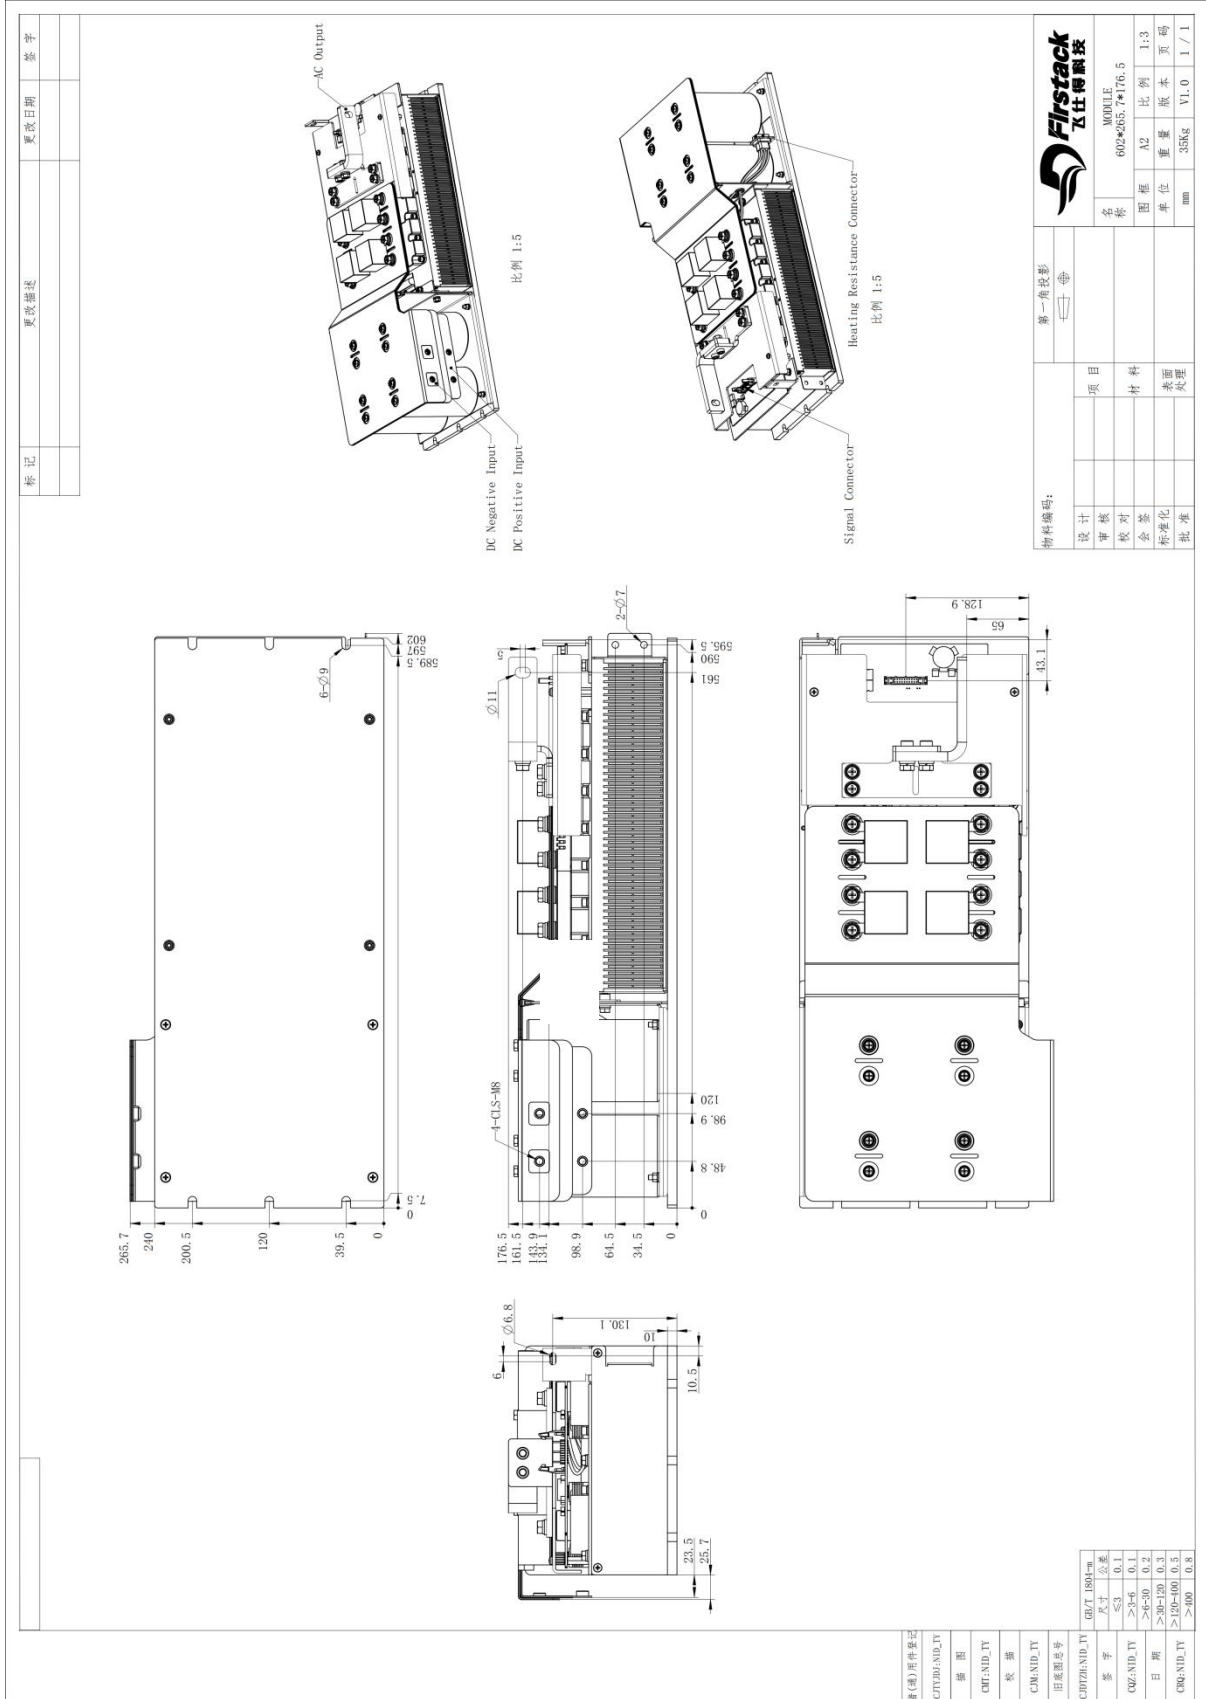

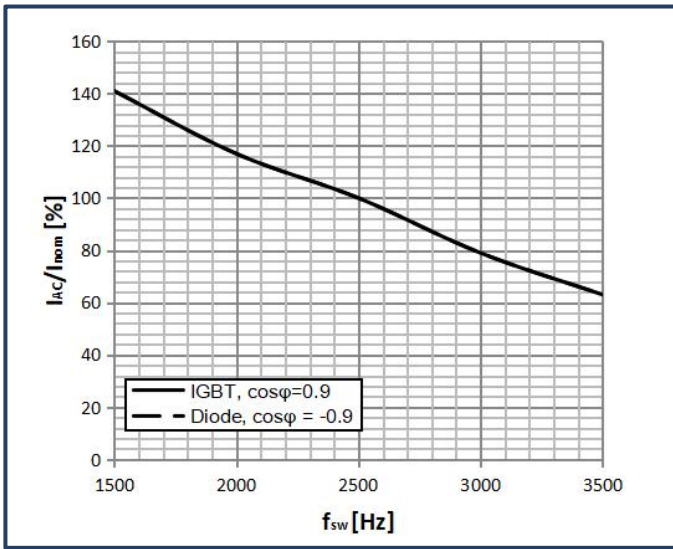


Fig.1 Output current VS switching frequency curve  $V_{DC}=800\text{ V}$ ,  $V_{AC} = 380\text{ VRMS}$ ,  $f_{AC\ sine} = 50\text{ Hz}$ ,  $T_{inlet} = 55^{\circ}\text{C}$

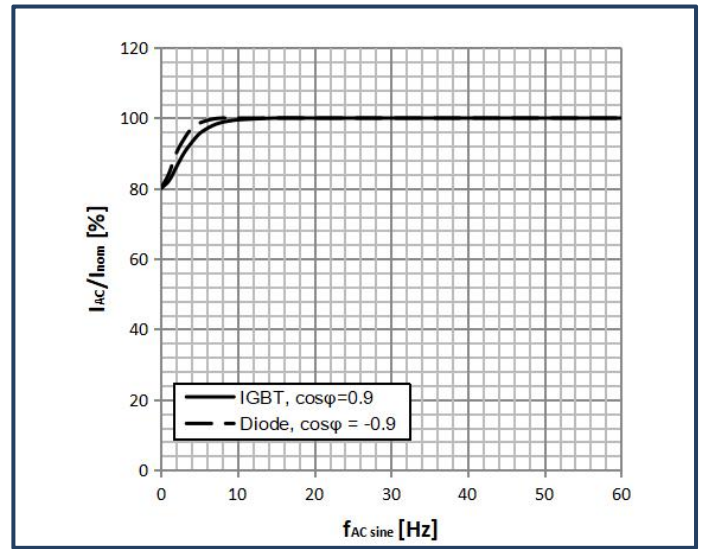


Fig.2 Output current VS output frequency curve  $V_{DC}=800\text{ V}$ ,  $V_{AC} = 380\text{ VRMS}$ ,  $f_{SW} = 2.5\text{kHz}$ ,  $T_{inlet} = 55^{\circ}\text{C}$

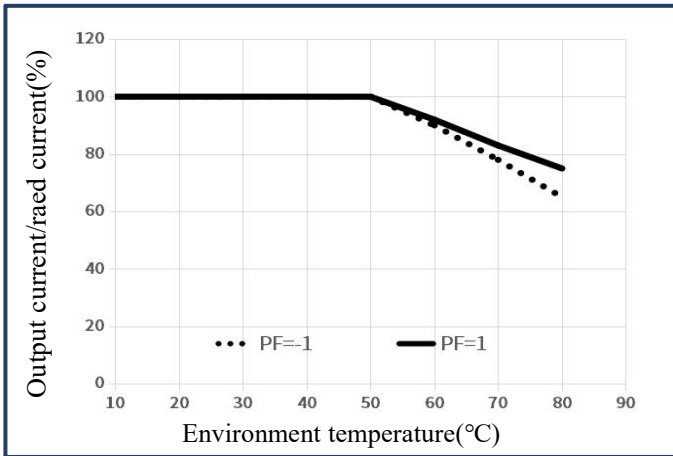


Fig.3 Output current VS ambient temperature curve( $V_{DC}=800\text{V}$ ,  $V_{AC}= 380\text{ VRMS}$ ,  $f_{AC\ sine}= 50\text{ Hz}$ ,  $f_{SW}=2.5\text{kHz}$ )

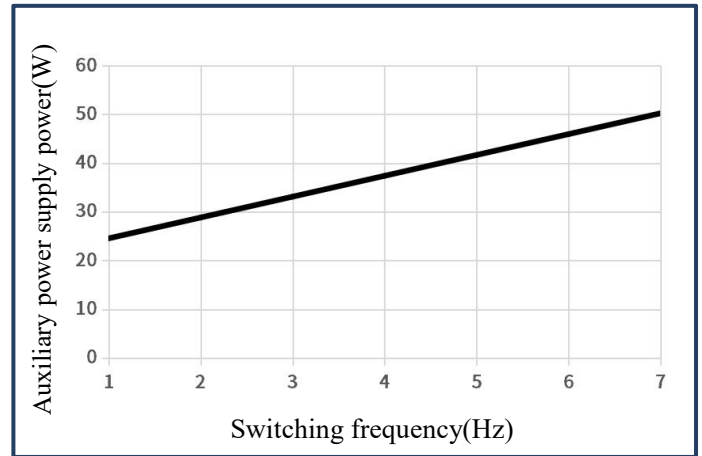


Fig.4 Auxiliary power requirement versus switching frequency curve

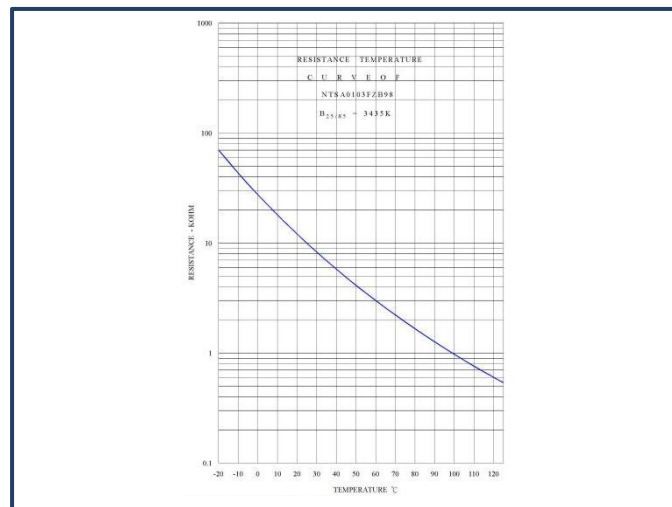


Fig.3 Table of Typical Temperature vs. Frequency for NTC Resistor

**Safety instructions**

1. The data contained in this product datasheet is intended for technically trained engineers only. The suitability of this product for your specific application scenario and the completeness of the information provided must be fully evaluated before implementation.
2. This product must not be operated beyond the absolute maximum ratings listed in this specification under any circumstances. Operating the device at multiple maximum rating thresholds simultaneously is strictly prohibited.
3. External cooling and dissipation requirements indicated in this specification must be strictly enforced to prevent performance derating or catastrophic thermal failure.
4. For applications in safety-critical systems (such as aviation, medical, or life-support systems), please contact Firststack to establish dedicated quality agreements and risk assessments before ordering.

**Legal disclaimer**

This manual gives a detailed introduction about the product, but cannot promise to provide specific parameters. No warranty or guarantee, express or implied, is given herein as to the delivery, performance or applicability of the product.

Firststack reserves the right to modify technical data and product specifications at any time without prior notice. Firststack's general payment terms and conditions apply.

**Tel: +86-571 8817 2737**

**Fax: +86-571 8817 3973**

**Website: [www.firstack.com](http://www.firstack.com)**

**Email: [fsales@firstack.com](mailto:fsales@firstack.com)**

**Address: 4-5/F, Building/5, Xizi Wisdom Park,  
No.1279 Tongxie Road, Hangzhou, China**